# SUBÉO et SUBÉO AX-IN
## Automatic covers
## Order form

CONFORME * NF 90-308 À LA NORME

*In as far as all the elements comprising the cover were ordered from BWT..

BWT Pool Products

### Installer

| | |
|---|---|
| Client code | |
| Company name | |
| Order reference | |
| Telephone number | |

### Delivery address

| | |
|---|---|
| Name | |
| Address | |
| Post code | |
| City | |

### PVC slats

☐ White ☐ Beige ☐ Grey
☐ Dark grey ☐ Light blue

### Polycarbonate slats

☐ Silver & black ☐ Translucent & black

### Elite Pro slats

☐ White ☐ Grey

### Finish on the pool section

☐ Stepped ☐ Shaped

### Finish on the step section

☐ Stepped ☐ Shaped

### Dimensions are quoted

☐ With the waterproofing finish
☐ Without the waterproofing finish

### Type of waterproofing finish

Must be filled out if "without waterproofing finish" is ticked, indicate the value of a single thickness.

☐ Liner or Membrane with underlay thickness : mm
☐ Liner or Membrane without underlay.
☐ Tiles thickness : mm
☐ Other thickness : mm

### Distance between the water and the top of the pool wall

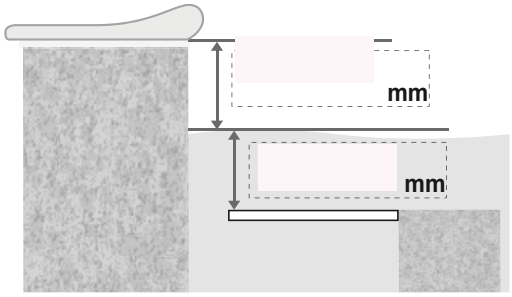


### Location of the skimmers/ overflows

**For the skimmers on the axis side, see the diagram on the next page.**

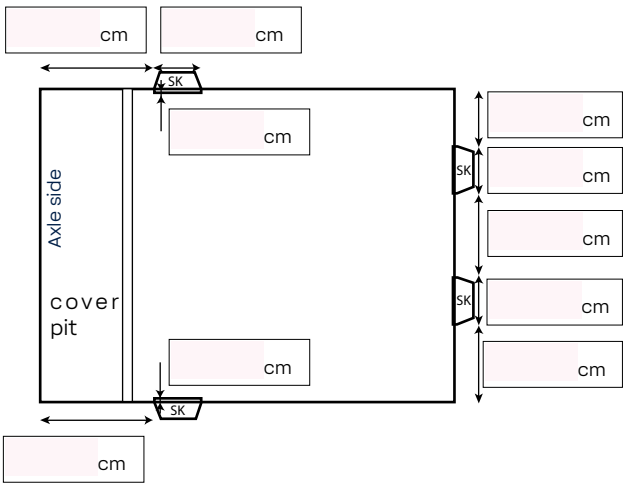


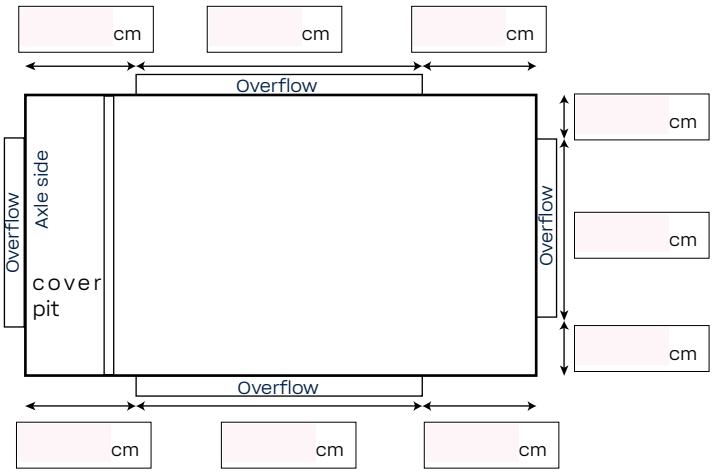


SK : Skimmer

IMPORTANT :
- If the skimmers are located along the length, indicate their position on the diagram and the distance that the flange protrudes.
- If the skimmers are located along the width, indicate their position on the diagram along with the length of the skimmer mouth.

Copyright protected- 04/2025a

# SUBÉO et SUBÉO AX-IN
## Automatic covers
## Order form

CONFORME * NF 90-308 À LA NORME

*In as far as all the elements comprising the cover were ordered from BWT..

BWT Pool Products

### Indicate the position of your skimmers/ return fitttings on the axle side

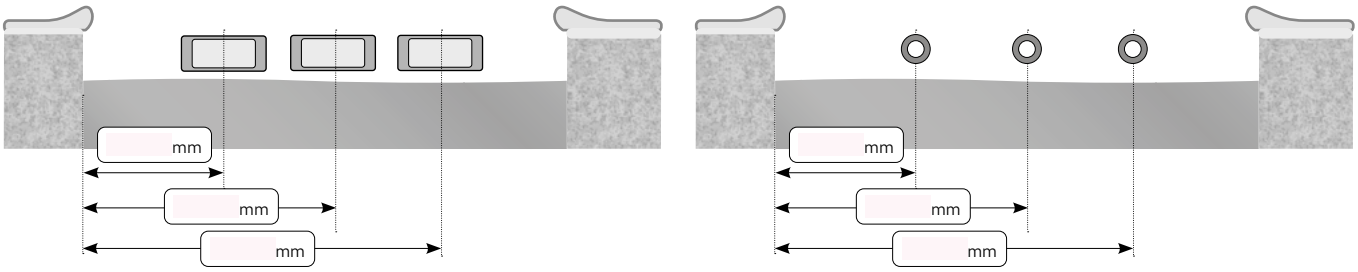


### Enter the dimensions

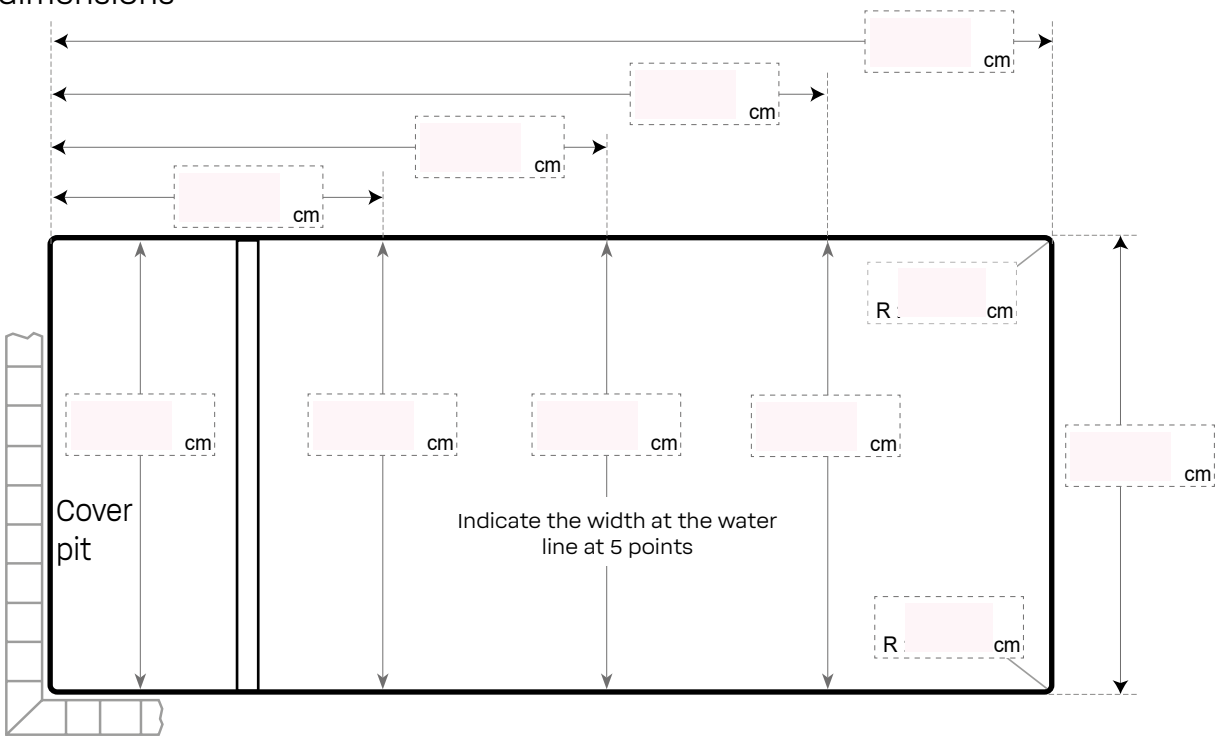


### Straight step

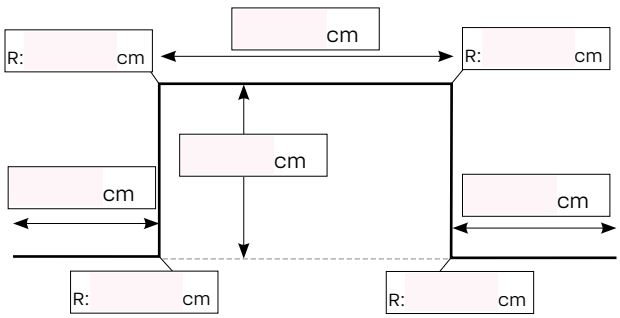


Straight steps, wider than 3 m and/ or with a horizontal depth greater than 2 m will not be dealt with as straight steps but rather as pool surface area.

### Roman step

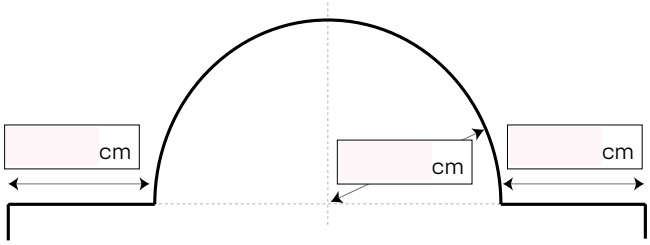


Roman steps wider than 4 m and/or with a horizontal depth greater than 2 m will not be dealt with as Roman steps but rather as pool surface area.

Copyright protected- 04/2025a

# SUBÉO et SUBÉO AX-IN
## Automatic covers
## Order form

CONFORME* NF 90-308 À LA NORME

*In as far as all the elements comprising the cover were ordered from BWT..

BWT Pool Products

### Template

WIll a template be provided?

Pool: ☐ Yes ☐ No / Step : ☐ Yes ☐ No

### Triangulation diagram

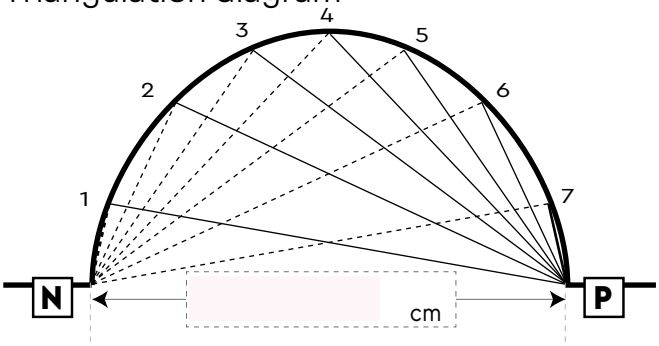


| | | | |
|---|---|---|---|
| **N1** | | **P1** | |
| **N2** | | **P2** | |
| **N3** | | **P3** | |
| **N4** | | **P4** | |
| **N5** | | **P5** | |
| **N6** | | **P6** | |
| **N7** | | **P7** | |

Roman steps or miscellaneous steps wider than 4 m and/or with a horizontal depth greater than 2 m will not be dealt with as Roman steps or miscellaneous steps but rather as pool surface area.

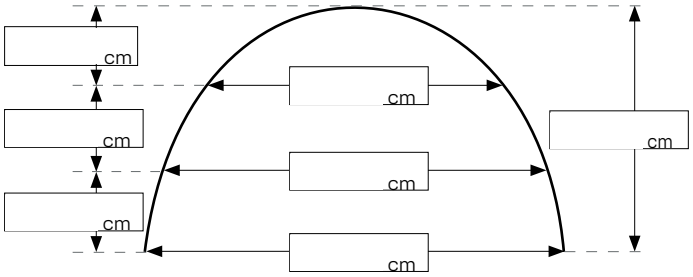


Roman steps wider than 4 m and/or with a horizontal depth greater than 2 m will not be dealt with as Roman steps but rather as pool surface area.

The NF P90-308 standard prohibits uncovered gaps more than 250 mm wide. In the case of an order for a stepped finish, if this would result in a gap more than 250 mm wide, the finish in the affected area will be shaped (mastic).

IMPORTANT :
Il est impératif de confirmer les dimensions du gabarit en les inscrivant sur celui-ci (longueur et largeur hors tout). Pour cause de dilatation, les gabarits en polyane ne sont pas acceptés. Il conviendra de noter le côté "ciel" du gabarit.

### Mechanical structure

☐ Stardeck (Motor in a dry pit)

Stardeck throughwall flange installed

☐ 275 mm ☐ 325 mm

☐ Other length: mm

☐ Stardeck AX-IN (Motor integrated into the axle)

☐ Stardeck AX-IN throughwall flange installed (to be ordered separately)

☐ with declutching

☐ without declutching

☐ Stardeck AX-IN, wall mounted

☐ with declutching

☐ without declutching

☐ Deck box White Beige Grey

Pool width at the axle mounting units: cm.

Depth of the axis (in accordance with civil engineering) cm.

### Order

☐ Key button ☐ Bluetooth key button

Copyright protected- 04/2025a

# SUBÉO et SUBÉO AX-IN
## Automatic covers
## Order form

CONFORME * NF 90-308 À LA NORME

*In as far as all the elements comprising the cover were ordered from BWT..

BWT Pool Products

### Version de l'habillage SUBÉO

☐ 2-beam versions + Concrete wall ☐ 2-beam versions + PPS wall ☐ Version 1 beam (non-standard grating mandatory)





### Fixing of SUBÉO beams

☐ Parts to be embedded (to be ordered separately) ☐ Wall mounts

Width at the beam fixation points: _____ cm

### SUBÉO Duckboarding

☐ Yes ☐ No (does not comply with the specifications or the standard NF P90-308)

### ☐ PVC base Duckboarding

☐ White PVC ☐ Beige PVC ☐ Grey PVC
☐ Anthracite grey PVC ☐ Anodized aluminum

PVC base dimensions

☐ 688 x 500 mm ☐ Non-standard x 500 mm *

*Mandatory in version 1 beam or in case of non-compliance with civil engineering. Non-standard grating sheet to be completed in the appendix of this purchase order.

### ☐ Special Duckboarding

☐ Weldable duckboarding ☐ Tiled duckboarding
2-beam versions 2-beam versions + Concrete wall

### Duckboarding for motor service hatch (950x500 mm)*

☐ Yes ☐ No
☐ White PVC ☐ Beige PVC ☐ Grey PVC
☐ Class IV pine ☐ Exotic wood

Service hatch lock kit*

☐ Yes ☐ No
*With dry motor pit wall

### Safety fasteners

☐ Wall mounted fasteners ☐ Sub-coping fasteners

### Stainless steel safety fasteners

Wall mount for water level ☐ Standard ☐ High

Under coping water level attachment ☐ Standard ☐ High

### Safety fastener colour

☐ Light blue ☐ Light grey ☐ Dark blue ☐ White
☐ Beige ☐ Grey ☐ Anthracite ☐ Black

### Overflow attachments

Overflow toggle attachment ☐ Fixed ☐ Retractable

Side toggle attachment for overflow ☐ Fixed ☐ Retractable

In the case of an overflow pool, you must indicate the location of the overflow on the plan and choose the most suitable type of fixation.

The number of attachments will be automatically determined based on the cover plan.

Copyright protected- 04/2025a

# SUBÉO et SUBÉO AX-IN
## Automatic covers
## Order form

*In as far as all the elements comprising the cover were ordered from BWT..

### PPS wall

☐ Yes ☐ No

☐ White ☐ Beige ☐ Grey ☐ Anthracite grey

☐ Flat or sloped base

With at the pps wall _____ cm Radius of horizontal corners _____ cm

☐ Truncated pyramid or curved base (if this option is ticked, a diagram must be provided)

Version embedded part

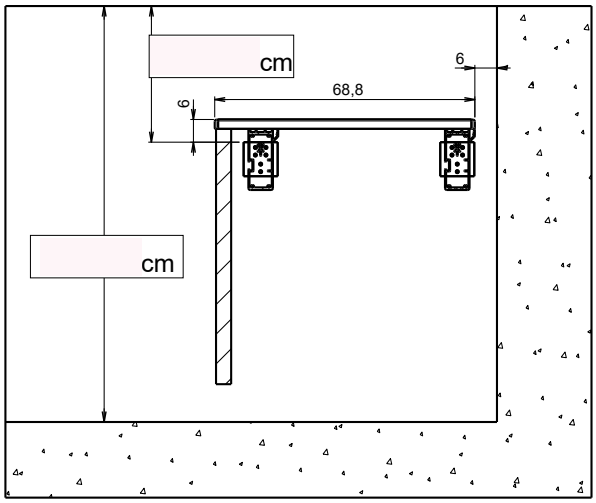


A- A

Version wall fixation

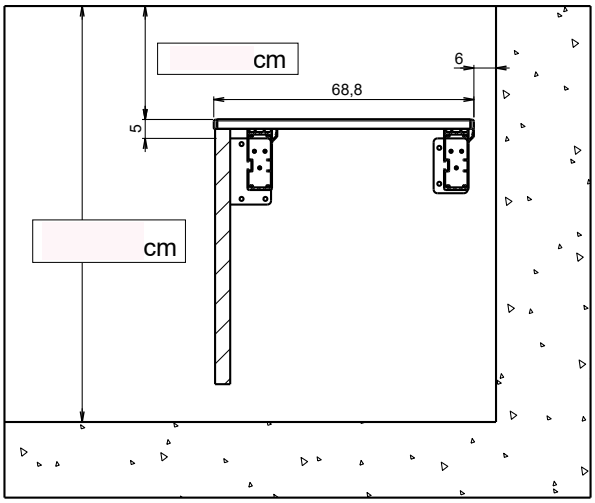


B- B

### Mode of availability

☐ Heavy-duty carrier without trolley (without appointment)
☐ Heavy-duty carrier with trolley (with appointment)
☐ Pick-up at the agency
☐ Pick-up at the factory (22)

The covers are delivered in boxes.

### Notes

**ATTENTION :**
Any incomplete order will result in a request for additional information. The response time to this request will be reflected in the overall lead time of your order

Print the order

| | |
|---|---|
| Date | |
| Signature | |

**Legal notices :**
Safety cover for swimming pools intended to deny children under 5 years of age access to the pool. BWT guarantees that Stardeck and Stardeck Inéo automatic slat covers comply with the French safety standard NF P 90-308, in as far as all the elements comprising the cover are ordered from BWT. This cover is intended solely for the pool whose dimensions are provided here.

Copyright protected- 04/2025a